



PREMAxx 48 l/min / 12,7 US gal

230 V-1~AC-50 Hz-EUS

Item number: 23 730
EAN: 4048358237309

Technical data

Connecting cable, length (m): 2
 Connection container: G 2" male, drum adapter
 Connection suction side: G 1" male
 Connection discharge side: G 1" male

Hydraulic data

Pumping media: fuel oil and diesel
 Pump design: axial gear
 Delivery rate under free discharge (l/min)
 / US gal: 48 / 12,7
 Suction height (m): 2,5
 Discharge height max. (m): 15
 Operating temperature (°C): -10 ... +40
 Bypass mode max. (min): 2
 dry run maximum: 2
 Noise Development (dBA) according to
 ISO: 76

Motor data

Voltage (V): 230
 Frequency (Hz): 50
 Power consumption (A): 2,0
 Power (kW): 0,42
 Thermal protection: self resetting
 Duty cycle (min): 30
 Rotation speed at 0,5 bar
 counterpressure (rpm): 10000
 Type of construction: IMB 5
 Safety class: IP34

Material of pump housing and pump: PA 6

Dimensions of pump LxWxH (mm): 130 x 130 x 350
 Weight (kg): 2,5

Specification

- For 200 up to 1000 l container
- Siphon protection acc. to WHG (German government regulation for environmental care), continuously active
- Motor with thermal protection switch, self resetting
- Euro two-pin plug, 2 m cable
- Illuminated on/off switch
- Valuable sales package


Special notes

- The pump is lightweight and very quiet in operation.
- Resistant against small dirt particles in the liquid to be discharged

- Can be manually operated in case of electric power blackout
- Pump can be used with compact systems up to 1000 l (45 100) with adapter (88 851)

Packaging

Dimensions LxWxH (mm):	330 x 260 x 220
Weight including package (kg):	2,7
Packing unit:	1,0

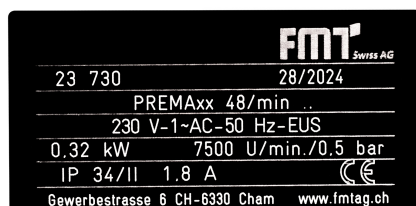

23730 PREMAxx 48 l/min / 12,7 US gal - 230 V-1~AC-50 Hz-EUS

