

OPERATING INSTRUCTIONS AND SAFETY NOTES

Two-hand grease gun



Pressol Schmiergeräte GmbH

This documentation is exclusively intended for the operating company and their staff.

Without our written consent, the content of this documentation (textes, figures, drawings, charts, diagrams etc.), must not be duplicated or distributed, neither in full or in part, utilized for the purpose of competition or passed on/made available to third parties.

Pressol Schmiergeräte GmbH

Parkstraße 7
93167 Falkenstein | Germany
Phone +49 9462 17-0
Fax +49 9462 17-208
info@pressol.com
www.pressol.com

Operating instructions translation

Date of issue: 10/2019

We reserve the right to make design and product modifications, which serve to improve the product.

Table of Contents

1.	Introduction	3
1.1	Preface	3
1.2	Obligations of the personnel	3
1.3	Symbols in this manual	3
1.3.1	Structure of the warning notes	3
1.3.2	General symbols	3
2.	Safety notes	4
2.1	Authorized personnel	4
2.2	Intended conditions of use	4
3.	Design and functional description	4
4.	Area of application	4
5.	Technical data	5
6.	Hazards when handling the grease gun	5
7.	Assembly	5
8.	Making the grease gun ready for operation	6
8.1	Advices for an ideal operation	7
9.	Care/Maintenance	7
10.	Accessories according to DIN 1283	7
11.	Repair/Service	7
12.	Disposal	7

1. Introduction

1.1 Preface

Please carefully read these operating instructions and observe in particular all safety notes!

Our staff will be pleased to provide support if you have any questions about the product.

Yours sincerely, Pressol Schmiergeräte GmbH

1.2 Obligations of the personnel

Before they start to work, all persons who are entrusted with work with the two-hand grease gun, are obliged:

- to follow all applicable regulations on occupational safety and accident prevention.
- to read and to comply with all safety instructions and warning notes contained in these operating instructions.

Please observe the following instructions in the interest of all concerned:

- Refrain from any unsafe working methods!
- Adhere to all hazard and warning notes contained in this manual!
- In addition to this documentation, keep to all generally accepted safety rules, legal provisions as well as all other binding rules regarding occupational safety, accident prevention and environmental protection!
- Wear appropriate protective clothing in accordance with the work to be done!
- Perform only work for which you have been sufficiently trained and instructed!
- Only genuine spare parts as well as original tools and auxiliaries of the manufacturer are allowed to be used in order to ensure the functional safety and maintain the warranty coverage.

1.3 Symbols in this manual

1.3.1 Structure of the warning notes

The warning notes have the following structure:



SIGNAL WORD

Type and source of the hazard

- Consequences of non-compliance with the notes
- Measures to avoid that risk

Depending on the danger level, different signal words are used:

Signal word	Danger level	Consequences of non-compliance
CAUTION	Possibly dangerous situation	Minor bodily injury
ATTENTION	Possibly dangerous situation	Damage to material property

1.3.2 General symbols

Symbol	Meaning
■	A small black square indicates the work you have to perform.
–	The dash denotes lists.

2. Safety notes

Various dangers may occur if the two-hand grease gun is improperly handled during installation, commissioning and daily operation.



WARNING

Risk of injury and damage to material property because of improper handling!

- Hold the manual at the disposal of the operating staff at the usage site of the unit.
 - Country-specific safety measures and accident prevention regulations must be observed.
-

2.1 Authorized personnel

Only qualified and authorized persons are allowed to operate and to work on the two-hand grease gun.

Persons are qualified if they are, due to their training, experience, instruction and knowledge of the relevant standards, able to assess assigned tasks and to identify potentially hazardous situations.

All persons charged with installation, operation, maintenance and repair work, must have read and understood this operation manual.

2.2 Intended conditions of use

The grease gun is designed exclusively for the delivery of grease lubricants.

Any use beyond these parameters can lead to serious risks and is regarded as use that is contrary to the intended purpose.

The operator is responsible for damages resulting from use other than the intended use.

3. Design and functional description

Two-hand grease gun, with ergonomic handles for 500 g screw-in cartridges.

The grease gun is suitable for supplying lubricant greases under pressure up to the viscosity class NLGI 2.

- The vacuum technology allows an easy to understand design of the grease gun.
- Fast and easy cartridge replacement.
- A removal of partially emptied screw-in cartridges is possible.
- Complete emptying of cartridge reduces impact on environment.
- Continuous check of filling level and grease type.
- Designed for an operation with long lubricating lines.
- Easy to use due to an uncomplicated technology and design.

4. Area of application

The grease gun is suitable for supplying lubricant greases up to viscosity class NLGI 2 under pressure.



ATTENTION

- Do not use below 10 °C!
-

5. Technical data

Grease gun	12 850 12 851
Diameter of grease gun pump piston:	10 mm
Supply volume/stroke:	2,0 cm ³
Operating pressure:	up to 400 bar
Grease gun discharge connection:	M 10 x 1
Burst pressure of system:	850 bar
Grease gun head burst pressure:	1200 bar
Filling options:	500-g-screw-in cartridge

Tab. 5-1: Technical data

6. Hazards when handling the grease gun



ATTENTION

Excess pressure can result in the bursting of the grease gun head and accessories!

- Do not use force when actuating the hand lever.
- Do not use an extension or other auxiliaries.
- Do not exceed the working pressures given in section 5.
- Use only original accessories compliant with DIN 1283.

Excess pressure at the greasing point can damage the grease nipple, bearings, and even the machine!

- Do not exceed the working pressures given in section 5.
- Comply with the machine manufacturer's maintenance and service instructions.



CAUTION

Defective accessories can lead to personal injury and material damage!

- High pressure hoses must not be kinked, twisted, or stretched.
- During their period of use, accessories must be checked for wear, cracks, and other damages.
- Defective accessories should be replaced immediately.
- The period of use for connecting hoses is a maximum of 6 years after the date of manufacture (see hose labelling).

7. Assembly

The grease gun is supplied assembled.

Depending on the model, accessories can or must be fitted.



NOTE

- When fitting accessories, ensure cleanliness and that the accessory makes a perfect connection to the grease gun.
- Use suitable sealants and adhesives (e. g. Teflon tape).

8. Making the grease gun ready for operation




CAUTION

Excess pressure can result in the bursting of the grease gun head and of equipment!

- When using the grease gun, use suitable equipment such as protective gloves and eye protection.

- 1** Remove the sealing cap from the cartridge. Bleed the cartridge while pressing the follower lightly until grease emerges.

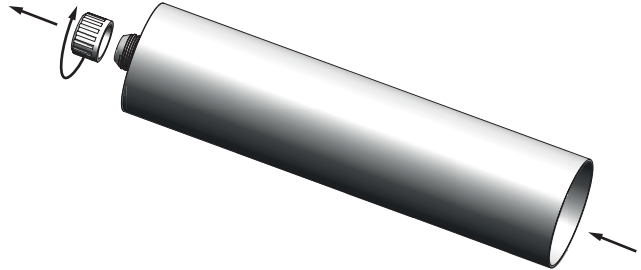

- 2** Screw the cartridge through the centering ring into the head of the open grease gun and fasten it hand-tight.



- 3** Press on the follower piston and start operating the grease gun until grease escapes at the mouth-piece. If required, repeat the procedure several times. Grease gun is now ready for operation.

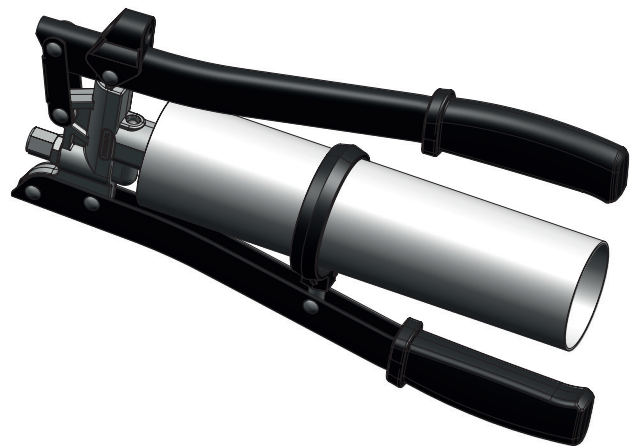


Fig. 8-1: Making the grease gun ready for operation

8.1 Advises for an ideal operation



NOTE

Since the piston chamber of the grease gun is not filled by spring pressure, but by the vacuum created by the piston, never open the hand lever jerkily.

- Operate the grease gun with even and steady working strokes.
- Depending on the viscosity of the grease used (based on the NLGI class and the temperature), the vacuum technology makes it necessary to wait for a sufficient refilling of the piston chamber with grease.

9. Care/Maintenance

The two-hand grease gun needs little care and maintenance.

Because of operator responsibility, the following parts must be checked regularly in order to avoid environmental, material or personal damage:

- Grease gun head
- Screwed connections
- Accessories (hoses, mouthpieces, etc.)

10. Accessories according to DIN 1283

(Extract from the Pressol range of accessories)

Item	Description	M 10 x 1	G 1/8"
1	Precision mouthpiece	12 643	12 743
2	Angled spout	12 635	12 735
3	Straight spout	12 435	12 475
4	High pressure hose, 11 x 300 mm	12 655	12 735
5	High pressure hose, 11 x 500 mm	12 665	12 765
6	Adapter, G 1/8" f, M 10 x 1 m	12 016	

11. Repairs/Service

The grease gun was developed and manufactured under compliance with the highest quality standards.

If in spite of all quality measures a problem occurs, please get in touch with our service contact partners:

PRESSOL Schmiergeräte GmbH

Phone +49 9462 17-216

Fax +49 9462 1063

service@pressol.com

12. Disposal

The operating company is responsible for the proper disposal of the two-hand grease gun.

Dispose of the different materials in accordance with all industry-specific, local, regional and federal regulations.

Only qualified personnel is authorized to disassemble and dispose of the grease gun.

Pressol Schmiergeräte GmbH

Parkstraße 7

93167 Falkenstein | Germany

Tel. +49 9462 17-0

Fax +49 9462 17-208

info@pressol.com

www.pressol.com

